



# 24" LED DC Television JTV24DC



## PRODUCT FEATURES

- DC power
- Integrated HDTV (ATSC) tuner
- HD ready (1920 x 1080 Full HD)
- jCOM protocol provides direct communication to JENSEN HDMI-equipped stereos and DVD players
- ARC (Audio Return Channel) via HDMI
- VESA 100mm x 100mm mounting pattern
- Dual-function remote control included
- Optional table-top stand (STDTV24DC)
- Dimensions: 22.5"W x 13.8"H x 1.9"D
- Weight: 8.7 lbs.

## INPUT/OUTPUTS

- Composite video input (NTSC/PAL compatible)
- Component video input (YPbPr)
- Stereo audio input
- HDMI input
- RF
- USB
- VGA with 3.5mm audio input
- Selectable (variable/fixed) line-level audio output (RCA)
- Digital SPDIF audio output (RCA)


DESIGNED TO MOVE [YOU]<sup>TM</sup>

**asa**  
ELECTRONICS<sup>TM</sup>  
2602 Marina Drive • Elkhart, IN 46514  
[www.asaelectronics.com](http://www.asaelectronics.com)



# 24" LED DC Television

## JTV24DC

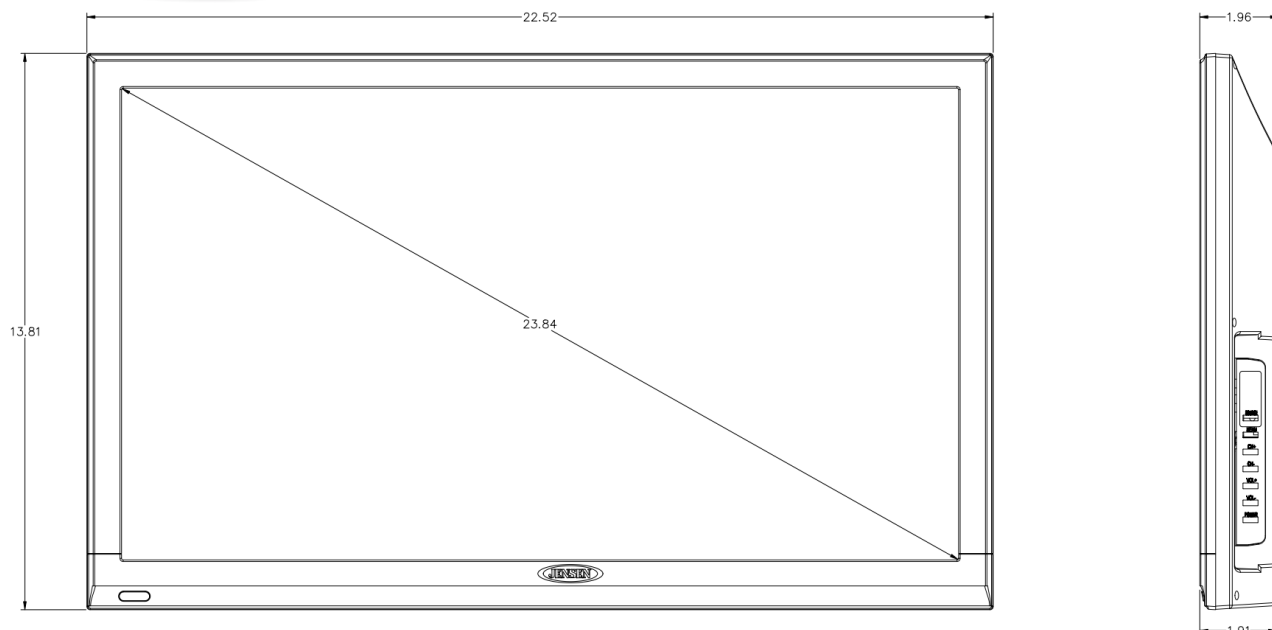

### **Specifications:** Test Spec ES-0001 (Modified)

#### **General Specifications:**

Power System	DC 12 V	
Power Consumption	10mA stand by	2.307A max
Operating Temperature Range	-4°F to 149°F	-20°C to 65°C
Storage Temperature Range	-22°F to 158°F	-30°C to 70°C
Maximum Relative Humidity	85%	
Overall Dimensions	22.52" W x 13.81" H x 1.96" D (without stand)	
Product Weight (unpacked)	8.7 lbs	
Regulatory Certification(s)	FCC	

#### **Performance Specifications:**

Video / Display System		NTSC/ATSC/PAL
Video Input Signal (Composite)		1Vp-p @ 75 ohms
Audio Output		2 x 3W @ 4 Ohm
LCD Specifications	Diagonal Size	23.8"
	Resolution	1920 x 1080
	Brightness	250 nit
	Contrast Ratio	1000 : 1
	View Angles	Top 89°
		Bottom 89°
		Left 89°
		Right 89°
	Display Format	16:9
	Response Time	20.0ms