



Product Replacement Guide

How to Replace iN-Command NCSTS9 Touch Panels



Side View – showing where to pull to remove trim ring




Mounted View

Author: Harold Arnold	Date: 5/4/2022
Approval: Josie Caban	Revision Level: V1



Trim Ring Removed

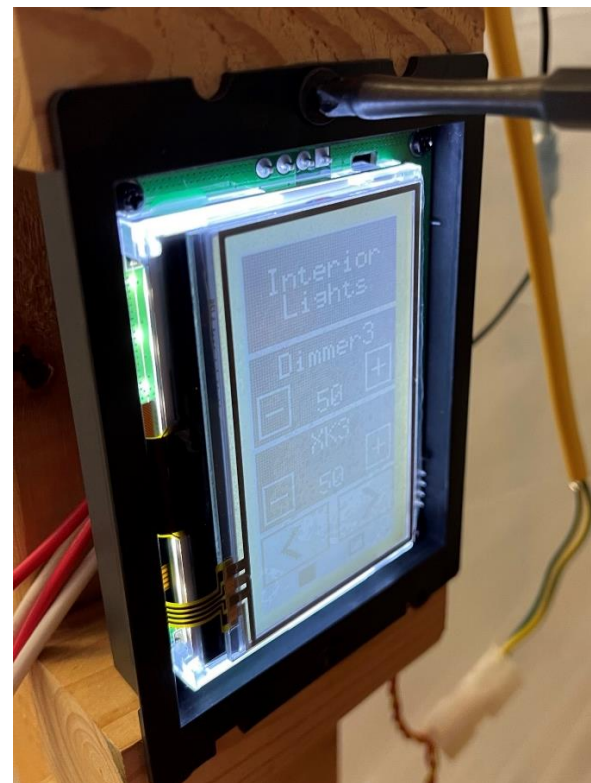


Remove screws from top and bottom

Author: Harold Arnold	Date: 5/4/2022
Approval: Josie Caban	Revision Level: V1



Back of Panel View – selected in red is a sticker that can be pulled back

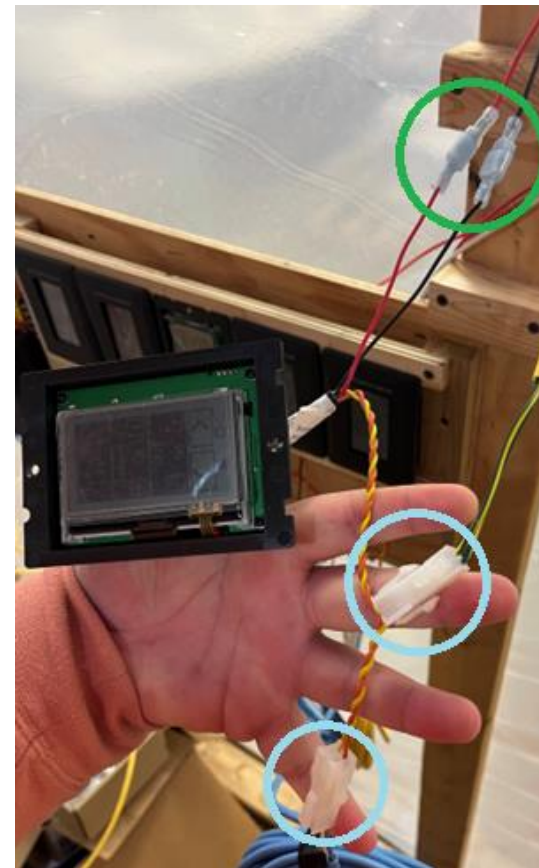

Wiring coming from NCSTS9, in green power & ground, in blue RVC connections into the network

Author: Harold Arnold	Date: 5/4/2022
Approval: Josie Caban	Revision Level: V1



Remove screws to remove black clip to gain access to the pigtail. Pinch on white harness and pull out.

Author: Harold Arnold	Date: 5/4/2022
Approval: Josie Caban	Revision Level: V1



The DIP switches mapping with device name.

1	2	3	4	DEVICE NAME
NA	OFF	OFF	OFF	SWITCH PLATE 1
NA	OFF	OFF	ON	SWITCH PLATE 2
NA	OFF	ON	OFF	SWITCH PLATE 3
NA	OFF	ON	ON	SWITCH PLATE 4
NA	ON	OFF	OFF	SWITCH PLATE 5
NA	ON	OFF	ON	SWITCH PLATE 6
NA	ON	ON	OFF	SWITCH PLATE 7
NA	ON	ON	ON	SWITCH PLATE 8

Peeling back sticker to reveal dip switches, match these settings exactly to those on the original NCSTS9 being replaced.

Author: Harold Arnold	Date: 5/4/2022
Approval: Josie Caban	Revision Level: V1



After replacing all NCSTS9 touch panels and matching the dip switch settings, you will need to load the floor plan for the RV to the iN-Command display using the provided USB flash drive and instructions


If you have any questions, please let us know. We are available Monday to Friday 7a–7p Est
877-845-8750
inquiry@asaelectronics.com

How to Load Floor Plan NCSP3/NCSP35

Settings > Software > Floor Plan > .json

- 1) Place the floor plan (.json) on an empty flash drive 16GB or smaller, do not put it inside of a folder
- 2) Insert the drive into the bottom of the Display Commander
- 3) On the DC, press Settings, then arrow down and press Software, next to Floor Plan press the arrow (>), and then select the floor plan file name (.json)
- 4) Press the House below the display to return to the Home Page

The functions of the RV should now be appropriately named for the specific RV you are in. A DC can function without a floor plan loaded to it, but you will notice options that are not functional because they will not be equipped to your RV's iN-Command system.

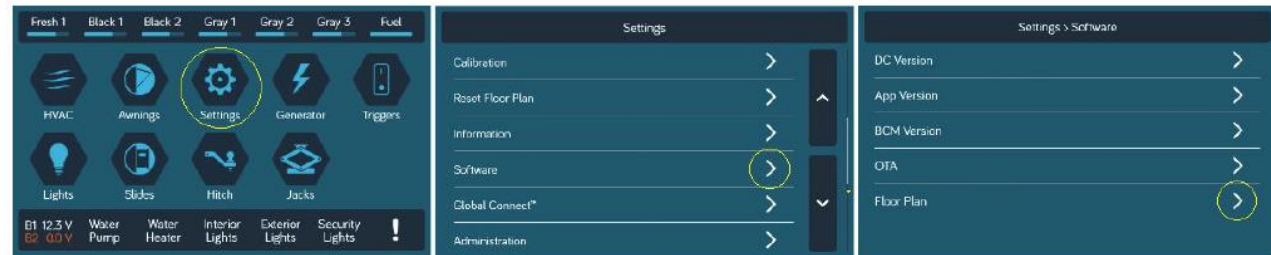

Author: Harold Arnold	Date: 5/4/2022
Approval: Josie Caban	Revision Level: V1