



DVD | USB | AUX | Bluetooth® Wallmount Stereo

JWM40



PRODUCT FEATURES

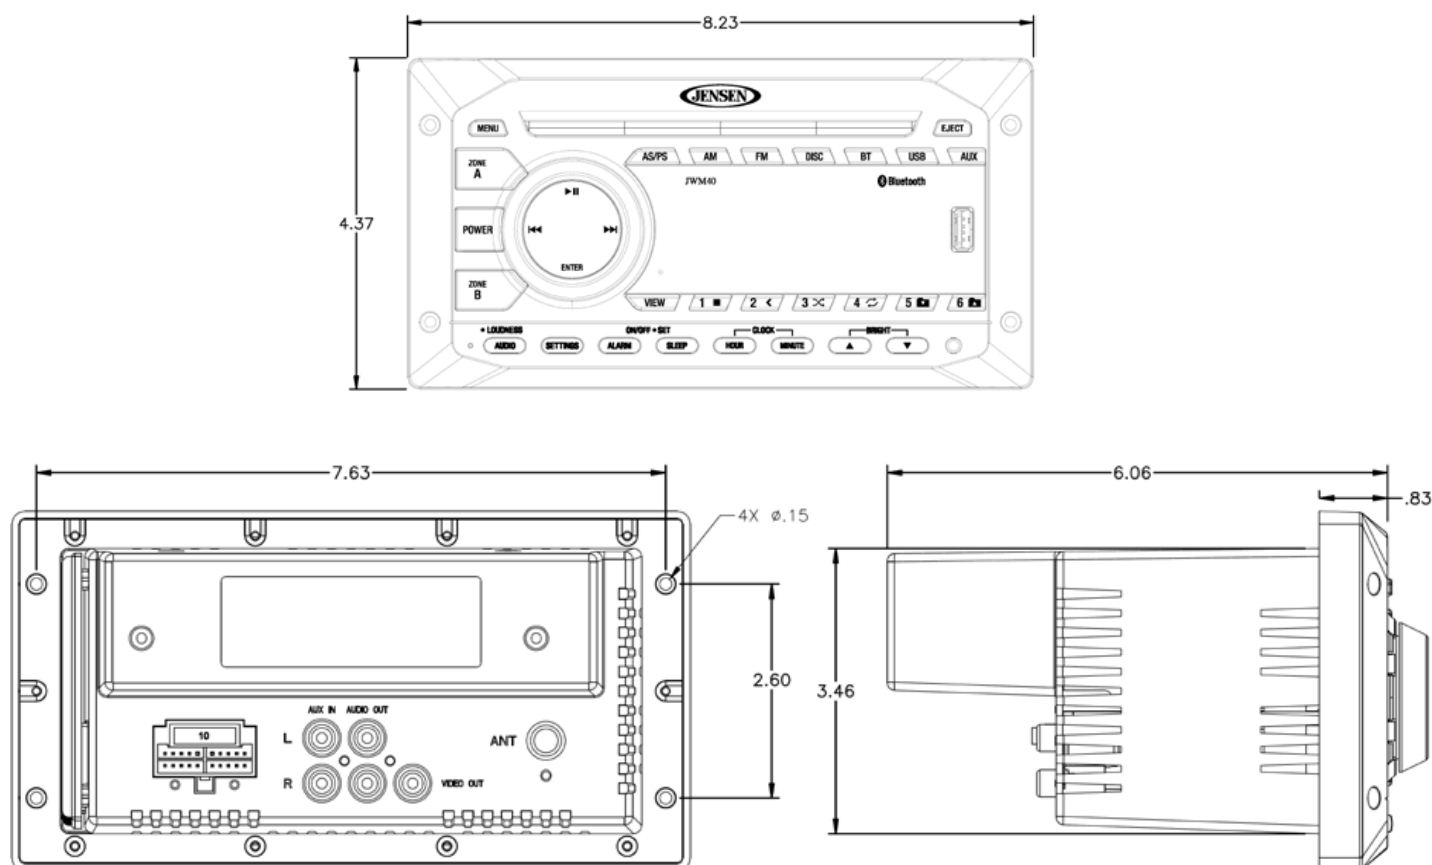
- Bluetooth® streaming audio (A2DP) and control(AVRCP)
- Front USB with MP3/WMA playback
- Slot type DVD/CD-R/RW and MP3 compatible
- 30 station presets (18FM, 12AM)
- 2 speaker zones
- 4 speaker outputs
- Front AUX A/V input (3.5mm)
- 1 rear audio RCA input/ 1 rear RCA output
- 1 RCA composite video output
- White LED backlight LCD panel with blue LED buttons
- Clock with alarm and sleep timer
- Remote control included
- 8.25"W x 4.4"H x 6"D

DESIGNED TO MOVE [YOU]™

asa
ELECTRONICS
2902 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com



DVD|USB|AUX|Bluetooth® Wallmount Stereo

JWM40

Specifications

General Specifications

Power System		12 V DC (2-Wire)
Operating Voltage Range		10 V to 16 V
Current Draw @ 12V	Idle	112 mA
	Nominal	.5A
	Maximum	6 A
Operating Temperature Range		-4°F to 149°F -20°C to 65°C
Storage Temperature Range		-22°F to 158°F -30°C to 70°C
Maximum Relative Humidity		95%
Overall Package Dimensions		8.25" L x 4.4" W x 6" D
Product Weight (unpackaged)		3.5 lbs.

Performance Specifications

FM Sensitivity		2 uV
AM Sensitivity		15 uV
CD Frequency Response		20 Hz to 20 kHz
CD Signal to Noise		73 dB
CD Skip Threshold (Random Freq. Profile)		1.6 g
Compatible CD Formats		CD, CD-R, R/W, MP3, DVD, DVD+/- RW
Output Power	RMS	5.8W x 4
	Maximum	24 Watts Total
Total Harmonic Distortion		1%
Applied Test Suite		ASA ES0001
Regulatory Certifications		FCC Part 15B

Features and specifications subject to change without notice.