



# 6.5" Coaxial Speakers

## [MS650RTL]




### KEY FEATURES:

- 50 Watts
- Waterproof
- Sensitivity: 86dB
- Frequency Response: 50Kz-20kHz
- 4 Ohms
- Dome mylar tweeter
- Polypropylene woofer cone
- Corrosion Resistant Materials (ASTM B117)
- UV Resistant Materials (ASTM D4329)



Kit comes with two speakers, two black grilles, two white grilles, two silver grilles and two light kits




MARINE CERTIFIED

**asa**  
ELECTRONICS

2602 Marina Drive • Elkhart, IN 46514  
[www.asaelectronics.com](http://www.asaelectronics.com)



# 6.5" Coaxial Speakers [MS650RTL]

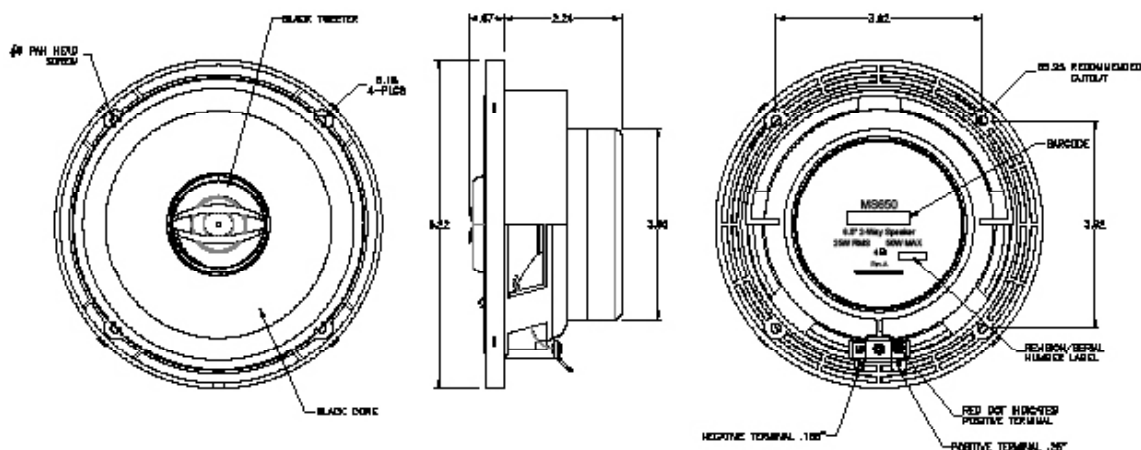

<b>Specifications:</b>		
<b>General Specifications:</b>		
Woofer Size	6"	
Woofer Material	Poly-propylene	
Tweeter Type	Dome	
Tweeter Material	Mylar	
Voice Coil Size	1" ASV	
Magnet Weight	8.8 oz	
Mounting Depth	2.4"	
Hole Size	5.0"	
Impedance	4 $\Omega$	
Temperature Range	-30°C - 70°C	-22°F - 158°F
Max RH	100%	
Terminal Size	Positive - 0.250"	Negative - 0.205"
<b>Performance Specifications:</b>		
Frequency Response	50 Hz - 20 KHz	
RMS Power	25W	
Max Power	50W	
SPL @ 1 W/ 1 M	86 dB	
Resonant Frequency	57 Hz	